



530 - 555 Wp

AXITEC
high quality german solar brand

AXIpremium XXL HC

High performance solar module
144 halfcell, monocrystalline



German-Australian-Engineering

The advantages:

15
Years

15 years Manufacturer's warranty



High module performance through
Half-Cut-technology and selected materials



Guaranteed positive selection tolerance
from 0-5 Wp by individual measurement



100 % visual electroluminescence inspection
in production



High stability due to innovative frame design




High quality junction box
and connector systems



Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90 % of the nominal performance
- 25 years manufacturer's guarantee on 85 % of the nominal performance

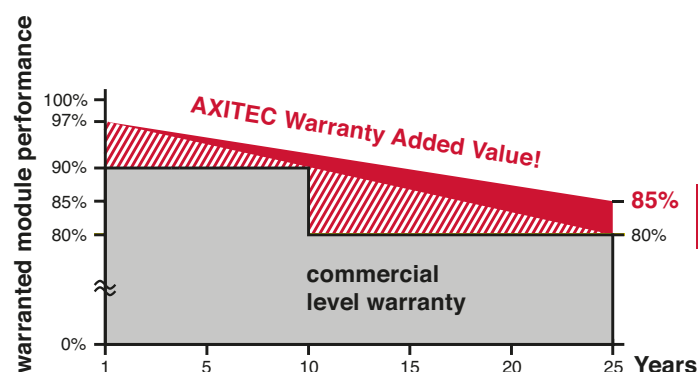

**1 - 8 % more power
after 25 years**



AXIpremium XXL HC 530 - 555 Wp

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp} (± 3 %)	Nominal voltage U _{mpp} (± 2 %)	Nominal current I _{mpp} (± 2 %)	Short circuit current I _{sc} (± 2 %)	Open circuit voltage U _{oc} (± 2 %)	Module conversion efficiency
AC-530MH/144VAU	530 Wp	41.40 V	12.81 A	13.73 A	49.25 V	20.51 %
AC-535MH/144VAU	535 Wp	41.55 V	12.88 A	13.79 A	49.40 V	20.70 %
AC-540MH/144VAU	540 Wp	41.70 V	12.95 A	13.85 A	49.55 V	20.89 %
AC-545MH/144VAU	545 Wp	41.85 V	13.03 A	13.91 A	49.70 V	21.09 %
AC-550MH/144VAU	550 Wp	42.00 V	13.10 A	13.97 A	49.85 V	21.28 %
AC-555MH/144VAU	555 Wp	42.15 V	13.17 A	14.02 A	50.00 V	21.48 %

Design

Frontside	3.2 mm hardened, low-reflection white glass
Cells	144 monocrystalline high efficiency cells
Backside	Composite film
Frame	35 mm silver aluminium frame

Mechanical data



L x W x H	2279 x 1134 x 35 mm
Weight	28.5 kg with frame

Mechanical load

Design load (pressure/suction)	1600 Pa / 1600 Pa
Test load (pressure/suction)	2400 Pa / 2400 Pa

Power connection

Socket	Protection Class IP68
Wire	approx. 1.3 m, 4 mm ²
Plug-in system	Plug/socket IP68, Stäubli MC4 PV-KST4-EVO 2 / PV-KBT4-EVO 2

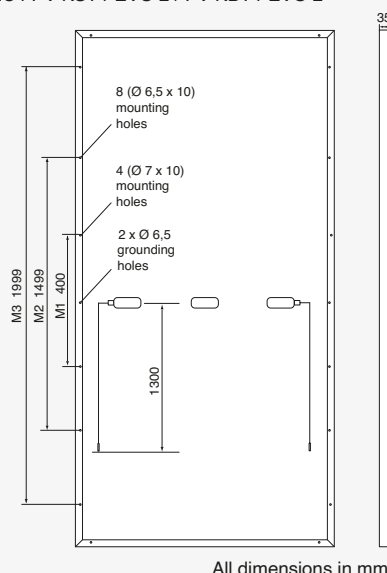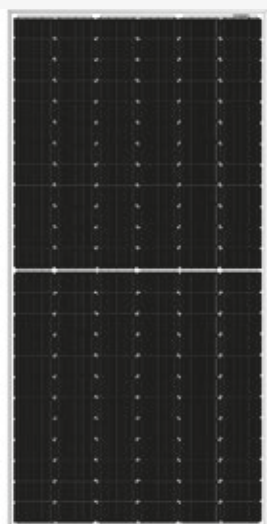

All dimensions in mm

Limit values

System voltage	1500 VDC
Module Fire Performance	CLASS C
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	25.0 A

Permissible operating temperature	-40°C to 85°C / -40F to 185F
-----------------------------------	------------------------------

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1.5;
wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0.28 %/K
Current I _{sc}	0.045 %/K
Output P _{mpp}	-0.35 %/K

Low-light performance (Example for AC-555MH/144VAU)

I-U characteristic curve	Current I _{mpp}	Voltage U _{mpp}
200 W/m ²	2.69 A	40.57 V
400 W/m ²	5.43 A	41.03 V
600 W/m ²	8.11 A	41.35 V
800 W/m ²	10.73 A	41.71 V
1000 W/m ²	13.17 A	42.15 V

Packaging

Module pieces per pallet	31
Module pieces per HC-container	620

country of origin:
made in People's Republic of China